



Huddly Cables



USB and extension cables.



Huddly Cables

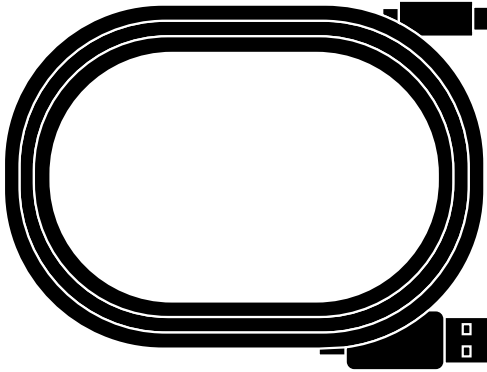

Cable 0.6 m USB 3 C to A

GTIN 7090043790290

Dimensions & Type

Length	0.6 m
Connectors	A to C
Color	Black
Weight	24 g
Cable diameter	4.0 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support


USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power

Voltage	5 V
Rated current (max)	2 A

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

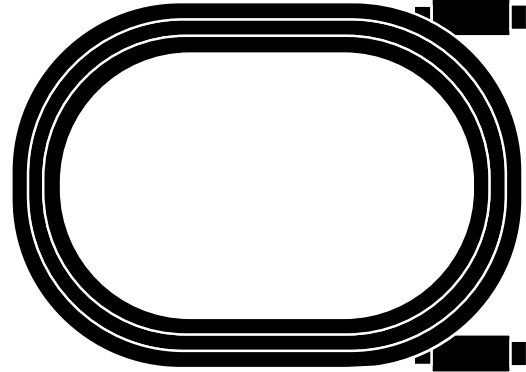

Cable 0.6 m USB 3 C to C

GTIN 7090043790337

Dimensions & Type

Length	0.6 m
Connectors	C to C
Color	Black
Weight	29 g
Cable diameter	4.0 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support

USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No


Power

Voltage	5 V
Rated current (max)	900 mA

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-HB

Huddly Cables

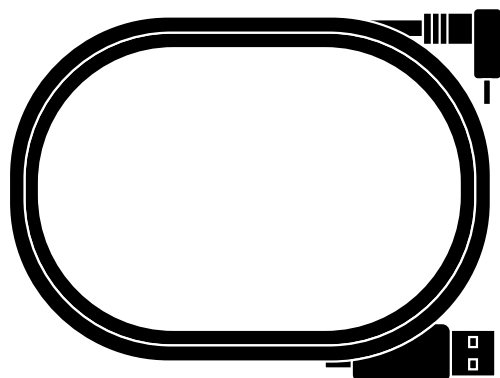

Cable 1.15 m USB 3 C to A

GTIN 7090043790351

Dimensions & Type

Length	1.15 m
Connectors	A to C (angled)
Color	Black
Weight	46 g
Cable diameter	4.5 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support


USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power

Voltage	5 V
Rated current (max)	3 A

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

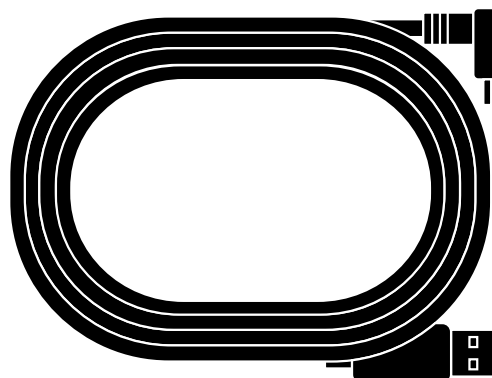

Cable 2 m USB 3 C to A

GTIN 7090043790276

Dimensions & Type

Length	2.0 m
Connectors	A to C (angled)
Color	Black
Weight	70 g
Cable diameter	4.5 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support

USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No


Power

Voltage	5 V
Rated current (max)	3 A

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

Huddly Cables

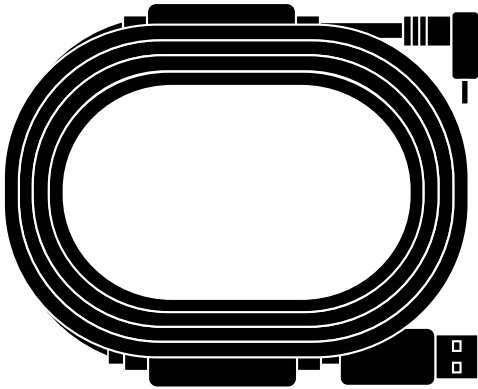

Cable 5 m USB 3 C to A

GTIN 70090043790368

Dimensions & Type

Length	5.0 m
Connectors	A to C (angled)
Color	Black
Weight	252 g
Cable diameter	4.5 mm

Temperature

Operating temperature	0 – 50°C
-----------------------	----------

USB Support


USB 1.1 FS/ 2.0 HS support	Yes
USB 3.1 Gen 1 support (5 Gbps)	Yes
USB 3.1 Gen 2 support (10 Gbps)	No

Power

Voltage	5 V
Rated current (max)	900 mA

Compliance

RoHS 2 (6)	Yes
RoHS 3 (10)	Yes
Halogen-free	Yes
Flammability rating	UL94 V-0

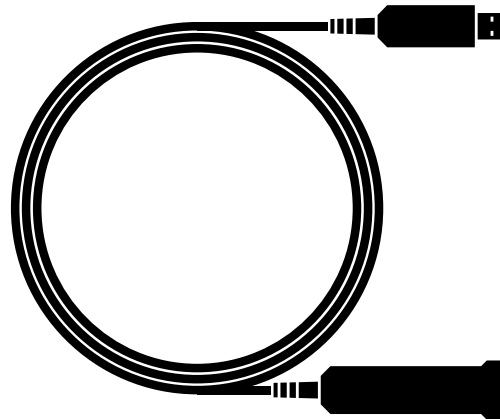

Extension 5 m USB 3 AOC AM to AF

GTIN 7090043790443

Dimensions & Type

Length	5 m
Connectors	A (male) to A (female)
Color	Black
Weight	208 g
Cable diameter	3 mm

Temperature

Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C


USB Support

Only USB 3.0 Supported

Power

Voltage	5 V
Rated current (max)	900 mA

Huddly Cables

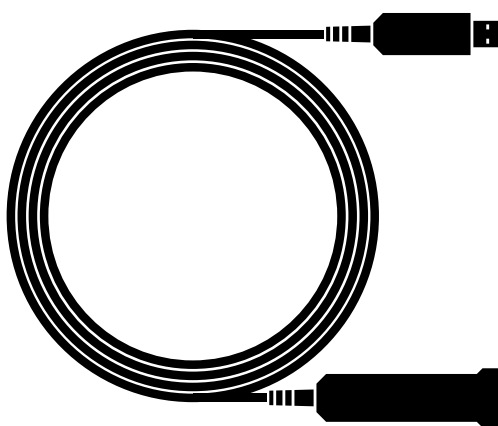

Extension 10 m USB 3 AOC AM to AF

GTIN 7090043790450

Dimensions & Type

Length	10 m
Connectors	A (male) to A (female)
Color	Black
Weight	283 g
Cable diameter	3 mm

Temperature


Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C

USB Support

Only USB 3.0 Supported

Power

Voltage	5 V
Rated current (max)	900 mA

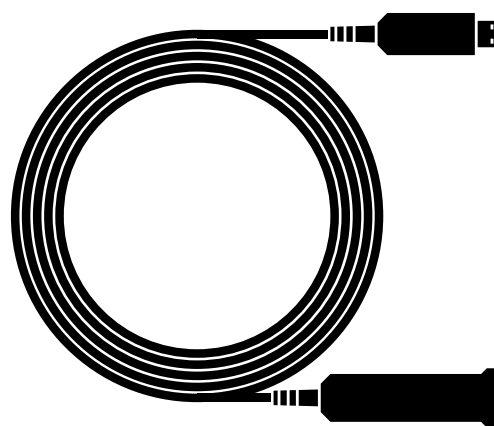

Extension 15 m USB 3 AOC AM to AF

GTIN 7090043790436

Dimensions & Type

Length	15 m
Connectors	A (male) to A (female)
Color	Black
Weight	388 g
Cable diameter	3 mm

Temperature

Operating temperature	0 – 50°C
Storage temperature	-20 – 80°C

USB Support

Only USB 3.0 Supported

Power

Voltage	5 V
Rated current (max)	900 mA