

Specifications

MFi Certified

Yes

DSP Modes (Presets)

Voice/Instrument/Flat

Cartridge Type

Electret Condenser (16 mm)

Polar Pattern

Unidirectional (Cardioid)

Bit Depth

16-bit/24-bit

Sampling Rate

44.1/48 kHz

Frequency Response

20 Hz to 20,000 Hz

Adjustable Gain Range

0 to +36 dB

Sensitivity

-40 dBFS/Pa at 1 kHz ^{[1][2]}

Maximum SPL

130 dB SPL ^[2]

Headphone Output

3.5 mm (1/8")

Power Requirements

Powered through USB or Lightning connector

Mute Switch Attenuation

Yes

Mounting Stand

Included

Stand Adapter

1/4 inch 20 thread (standard tri-pod mount)

Housing

PC/ABS

Net Weight

Without Mounting Stand
0 . 09 kg (3 . 17 oz.)
With Mounting Stand
0 . 16 kg (5 . 64 oz.)

Dimensions

66 x 67 x 65 mm H x W x D

Dimensions with Stand


89 x 142 x 97 mm H x W x D

Cable


1 m USB cable/1 m Lightning cable (LTG models only)

^[1]1 Pa=94
dB SPL

^[2]
At Minimum Gain, Flat Mode

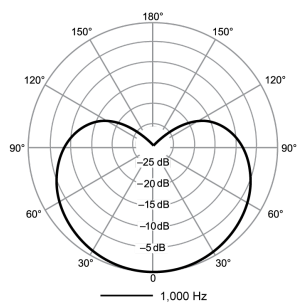

Polar Pattern

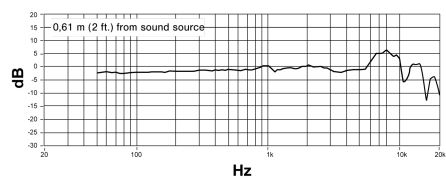

Frequency Response